

Project Name:	Type:
Note:	Date:

LED LIGHTING SOLUTION FOR COMMERCIAL INDOOR AND GREENHOUSE APPLICATIONS

TECHNICAL SPECIFICATIONS	
057830	WVW
59633,9	VS4HY/YV24
5963	KPTTPUN
769-09	>95%
D C RT	R 12
T R T	assie
R T R TUR	-40 122
R T	uitable or dry wet locations
LIFEIME	L90 > 54,000 Hrs
RR T	7 year limited
CERTIFICATIONS	ETL, DLC, CE, FCC
HEAT LOAD PER FIXTURE	3276 BTU


MAXIMUM POWER ELECTRICAL DATA				
AC VOLTAGE	120V	208V	240V	277V
AC CURRENT	8.3A	4.66A	4.01A	3.47A
AC POWER	985W	970W	960W	960W
POWER FACTOR	0.998	0.982	0.969	0.945

PPFD READING


12" Height @ 100% (1000W)

PERFORMANCE DATA	MAX. POWER @ 12"H
PPF	2600 $\mu\text{mol/s}$
PPFD	1393 $\mu\text{mol/m}^2/\text{s}$
PPE	2.7 $\mu\text{mol/J}$

RECOMMENDED SET-UP
Flower: 4' X 6' Area
Veg: 4' X 6' Area, Max: 4' X 8' Area

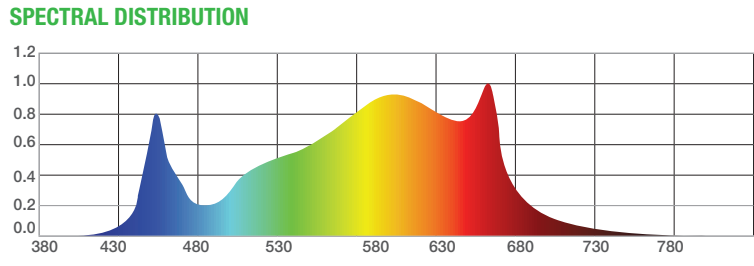

- WHAT'S IN THE BOX**
- 1x Daisy Chain Data Cable
 - 1x 240-120V plug adapter
 - 2x steel wire sling
 - 2x 1/8 Rope Ratchets
 - 4x thumb screws

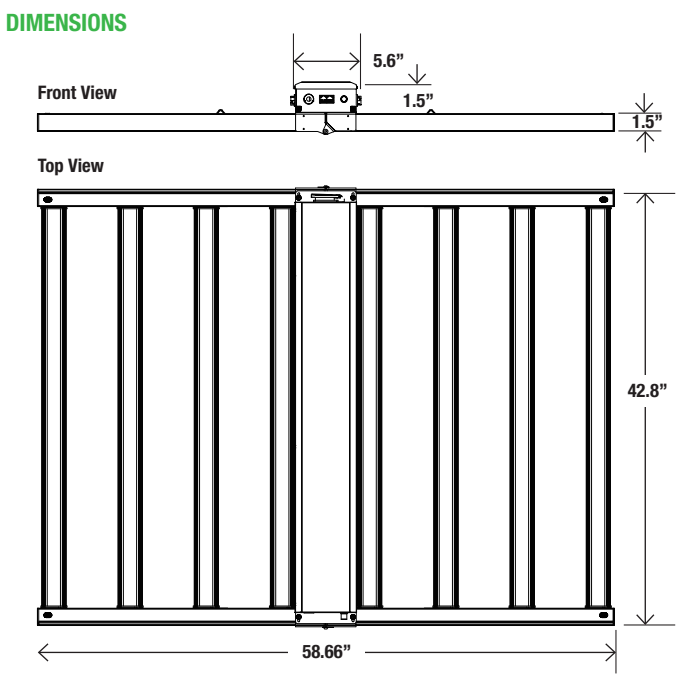

GROSS WEIGHT: 42 lbs