


3 Wattages in 1


1:1 Replacement

Adjustable Angle



WATTAGE	690W	840W	1100W
PPF	2208 umol/s	2722 umol/s	3476 umol/s
PPE	3.26 umol/j	3.24 umol/j	3.16 umol/j

DIMENSIONS

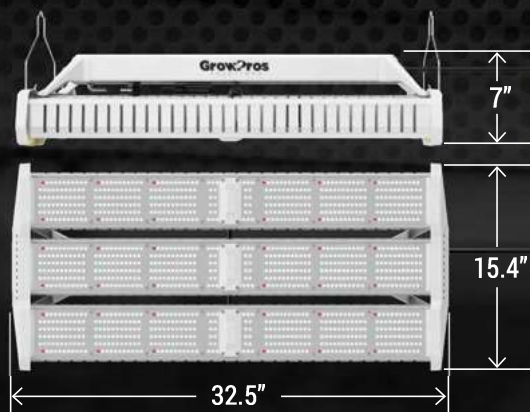


Weight: 0.53 lbs

MODEL	GPS-AK-690	GPS-AK-840	GPS-AK-1100
WATTAGE	690W	840W	1100W
AC CURRENT @ 208V	3.5A	4.21A	5.52A
AC CURRENT @ 240V	3.05A	3.71A	4.78A
AC CURRENT @ 277V	2.71A	3.24A	4.15A
CONTROL	0 - 10v dimming		
OPERATING TEMP.	32°F to 104°F		
HEATLOAD PER FIXTURE	2353 BTUs	2865 BTUs	3751 BTUs
IP RATING	IP65		
SPECTRUM	Full Spectrum + Far Red		
WARRANTY	5 YEARS LIMITED		

FEATURES & BENEFITS

- Ideal for Indoor or Greenhouses
- Angle Adjustable light bars for concentrating PPFD or maximizing footprint
- Exceptional heat dissipation and durable construction
- 1:1 HPS to LED Replacement for seamless retrofit
- Adjustable internal wattage switch offers unique versatility for adapting to available electrical loads and maximizing rebates.
- Waterproof data cords for wet environments with high humidity

FULL SPECTRUM + FR

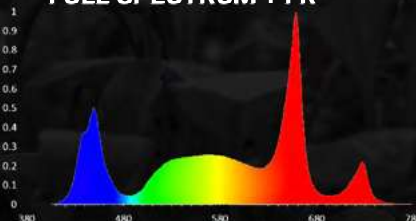

24" Height @ Max. Power Setup							
840		944		1042		939	837
	957			1198		964	
943		1180		1449		1159	984
			1764	1860	1789		
1030	1223	1624	1919	2026	1922	1630	1213
			1733	1854	1781		
977		1173		1477		1183	946
	961			1198		960	
847		994		1031		980	834